


Notes:


- 1) The capacitor at the V- pin of the MAX must be connected with its + pin to GND. This is intentional, no drawing mistake.
- 2) For the signal names of the serial interface #1 A at the last position indicates the Atmega, Z indicates the Z180
- 3) Pinouts of the serial connectors are for female DB9, straight connection to terminal.

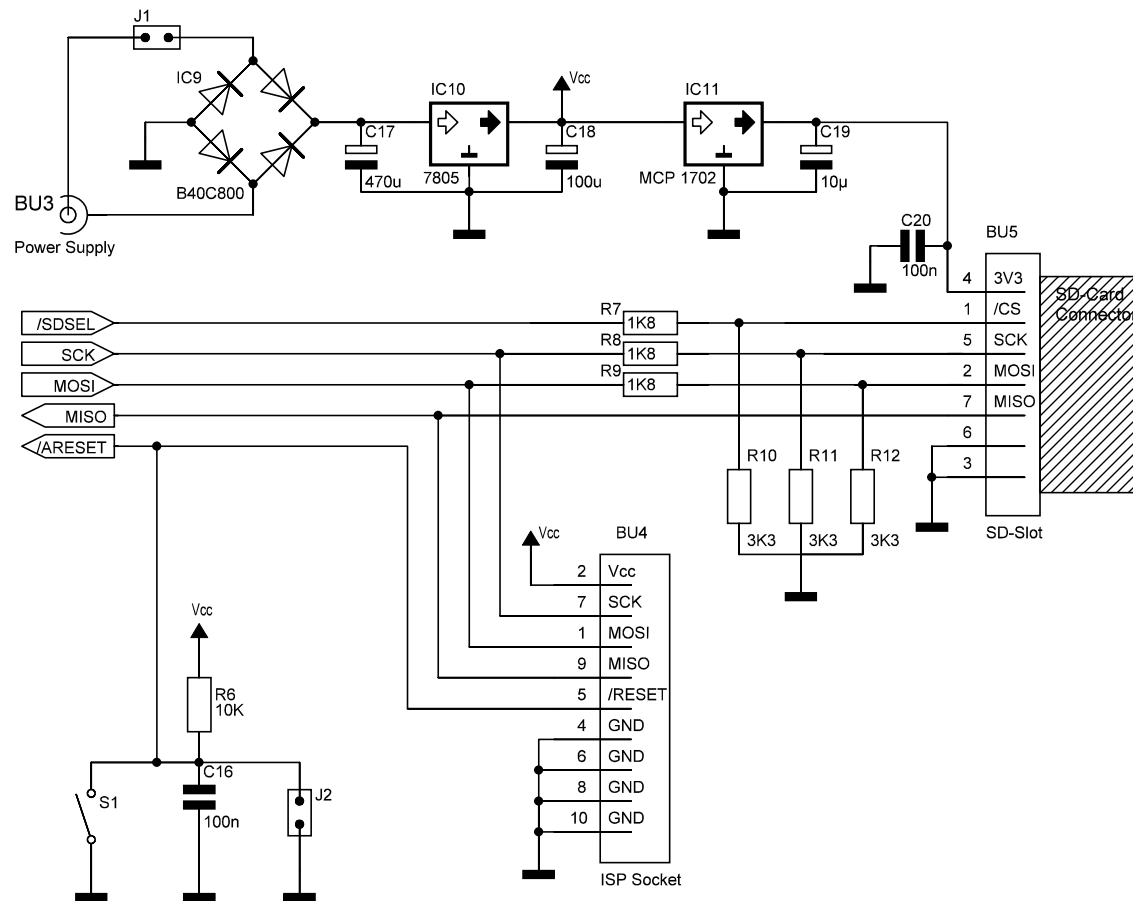

Notes:

- 1) Jumper J1 to be either closed or connected to external On/Off switch.
- 2) Jumper J2 to be either left open or connected to external reset button.

ADDRESS BUS [A0 .. A15]

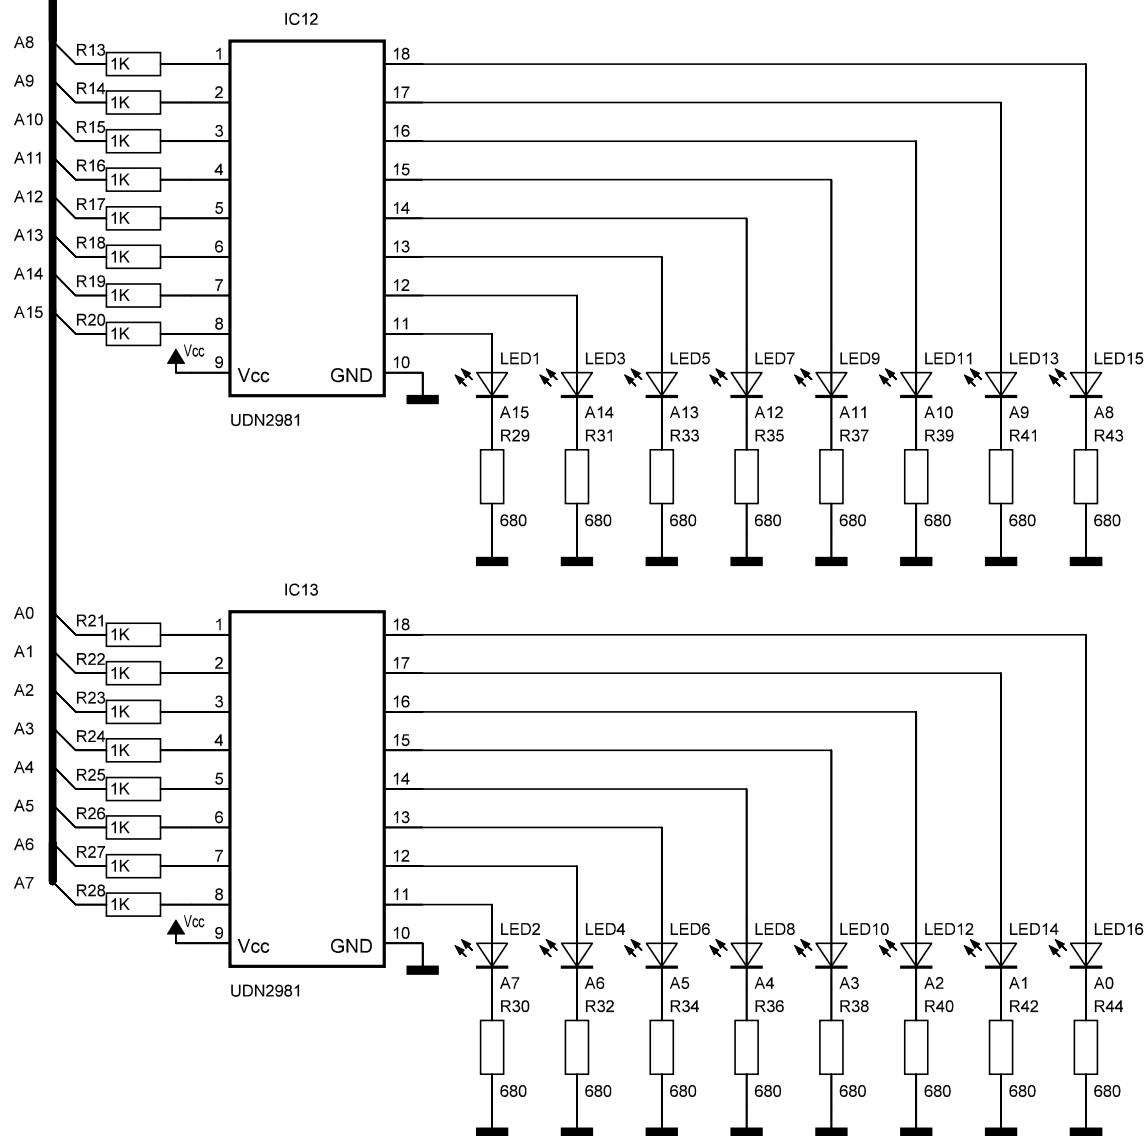

DATA BUS [D0 .. D7]

